

Constant level trolleys

always up to your required level





CONSTANT LEVEL TROLLEYS

Aesthetically pleasing,
ergonomic
and functional

> NOTES

An
ACTIWORK
exclusive

Easy to clean metallic platform
Grooved rubber coating option

Supporting structure and guide rails
in high-strength precision steel finish

Various industrial applications

- Pharmaceutical
- Printing
- Wood work
- Electronics
- Service sectors
- Motor

> NOTES

A trolley which
is always up to
your required
level

The 1st box is
removed ...

The next
is removed ...

But the height
remains constant.

The same level no matter
what the load!*

(*Load tolerance 10 %)


4 load ranges:
25 - 45 - 65 - 85 kg

Very simple calibration
(for model Ergo 85)

Model ERGO 85

Calibration
chart

Simple load capacity setting
using adjustable control
and lockable in position

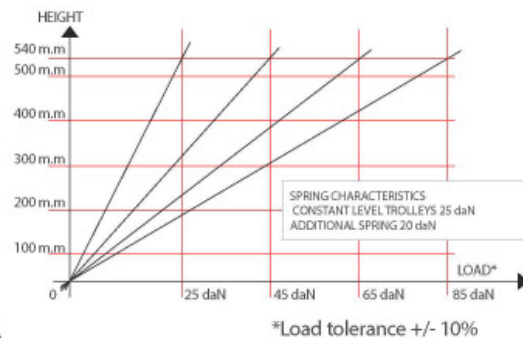

Ergonomic handle grip

Carefully designed

Innovative and silent height adjustment
3 times faster than conventional models

100% mechanical operation
with no motor or batteries (no maintenance)

Extended base for protection
of the trolley and its contents

Swivel casters with trackless rubber,
2 with brakes

Actilevel Ergo 85 /A

Constant level trolleys

- In the Ergo 85/A model the load capacity can be easily adjusted between 20 and 85kg by entering the setting on an upper panel.
- In the Eco 85/A model calibration of capacity is possible by removing the front panel and unlocking the springs
- 4 adjustment control ranges 25/45/65 and 85kg
- Careful and ergonomic design and development
- Innovative and silent height adjustment mechanism 3 times faster than conventional models
- 4 swivel casters diameter 80x22 mm, made of trackless rubber, 2 with brakes
- Innovative system which allows the rotation of two of the casters to be blocked, in to improve the manoeuvrability of the trolley
- Ergonomic handle grip
- Supporting structure and guide rails in high-strength precision steel finish
- Platform with guide rails on silent nylon rollers
- Steel construction in grey epoxy paint Ral 7047 finish
- Minimum/maximum height of platform: 240 / 780mm
- Weight: 55 kg
- Reference : CL52B001 B for the Eco model CL52B001 A for the Ergo model



100% mechanical -
no motor or batteries
MAINTENANCE FREE



Actilevel Eco 85 / A
Ref.: CL52B001 B

NEW ERGONOMIC DESIGN



Innovative system which allows the rotation of two of the casters (FW and RV) to be blocked, improving manoeuvrability.

THE EXPERT'S VIEW

Technical


This trolley places the load at the same level as your workstation

Double function: cart and height adjuster
Reduces risk of back injury
Productivity is optimised by time saved
Simple and quiet mechanism

No more of that !



No more back pain !

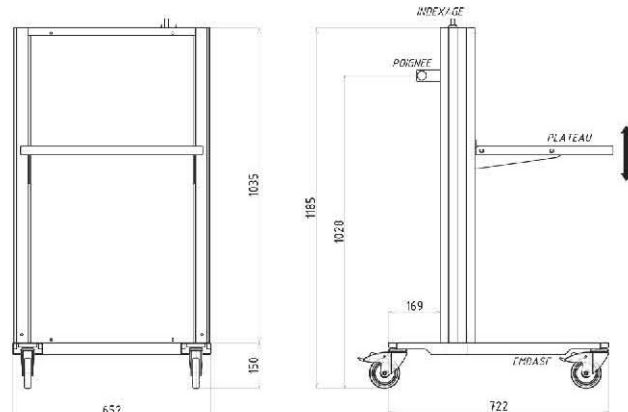

Packline

CONSTANT LEVEL TROLLEYS STAINLESS

Our range of constant level trolleys is also available in a stainless version, frequently used in pharmaceutical, chemical, food (restaurants ...) where regulations requires using stainless steel.



A : Actilevel® ERGO 85/I

Constant level trolleys stainless

- In the Ergo 85/I model the load capacity can be easily adjusted between 20 and 85kg by entering the setting on an upper panel.
- In the Eco 85/I model calibration of capacity is possible by removing the front panel and unlocking the springs
- 4 adjustment control ranges 25/45/65 and 85kg
- Careful and ergonomic design and development
- Innovative and silent height adjustment mechanism 3 times faster than conventional models
- 4 swivel casters diameter 80x22 mm, made of trackless rubber, 2 with brakes
- Innovative system which allows the rotation of two of the casters to be blocked, in order to improve the manoeuvrability of the trolley
- Ergonomic handle grip
- Supporting structure and guide rails in high-strength precision steel finish
- Platform with guide rails on silent nylon rollers
- Stainless steel construction AISI 304 I (on request AISI 316)
- Minimum/maximum height of platform: 240 / 780mm
- Weight: 55 kg
- Reference: CL52B001 B for the Eco model CL52B001 A for the Ergo model

Model	Reference
A Ergo 85/I	CL52B002 A
B Eco 85/I	CL52B002 B



B : Actilevel® ECO 85/I